



4.6c RS485 TRANSMITTER - WIRING

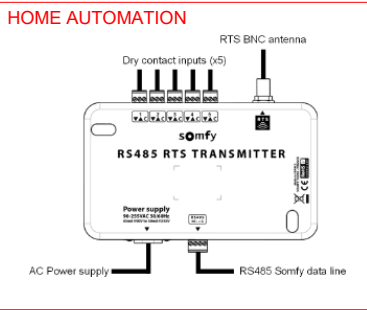

RS485 TRANSMITTER  
COMMUNICATES  
WIRELESSLY WITH  
RTS RECEIVER

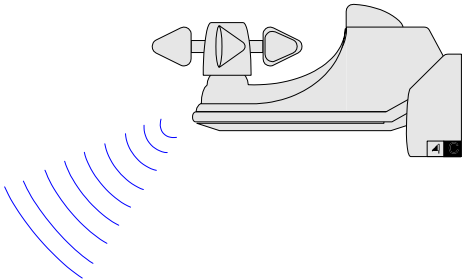

EOLIS RTS WIND SENSOR  
REQUIRES 240V POWER  
ACTIVE & NEUTRAL

WIRELESS COMMUNICATION  
BETWEEN RECEIVER AND  
WIND SENSOR

MAINS POWER IN  
ACTIVE  
NEUTRAL  
EARTH

4 CORE / TWIN ACTIVE  
CABLE LENGTH - 1500MM  
USE ONLY BROWN ACTIVE

MOULDED  
PLUG

WIRELES RTS  
RECEIVER

MOULDED  
PLUG

4 CORE / TWIN ACTIVE MOTOR CABLE  
CABLE LENGTH - 900MM

MOTOR

