
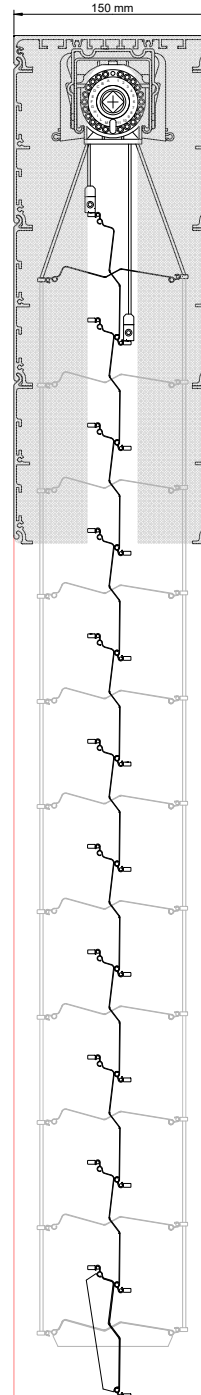


3.8 Pelmet End Cap - Slotted Recess End Cap

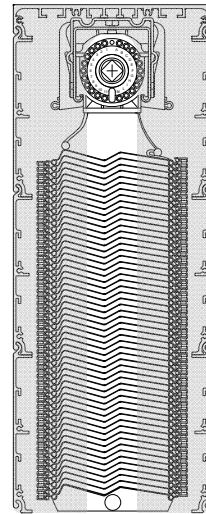

x = Variable deduction according to installation requirements

The slotted recess pelmet end cap allows for the pelmet to be produced to a narrower measurement when the installation is within a reveal.
The blind unit and side channels remain tight to the reveal.

Example - Shroud Installation

- Avoids damage to finished painted surface.
- Avoids internal radius or welded corners.

*Dashed red line indicates the operating area of the unit.
This area **MUST** remain unobstructed.
Design consideration or planned use of awning windows must observe this restriction*

